

1. Slide light frame over the top of the uprights.




Gently tighten the knob.




2. If you have a plastic frame light, skip forward to 2b.

2a. For steel frame lights, position with nylon fasteners (On top of light fixture) below the two holes in the frame. Insert and tighten fasteners.

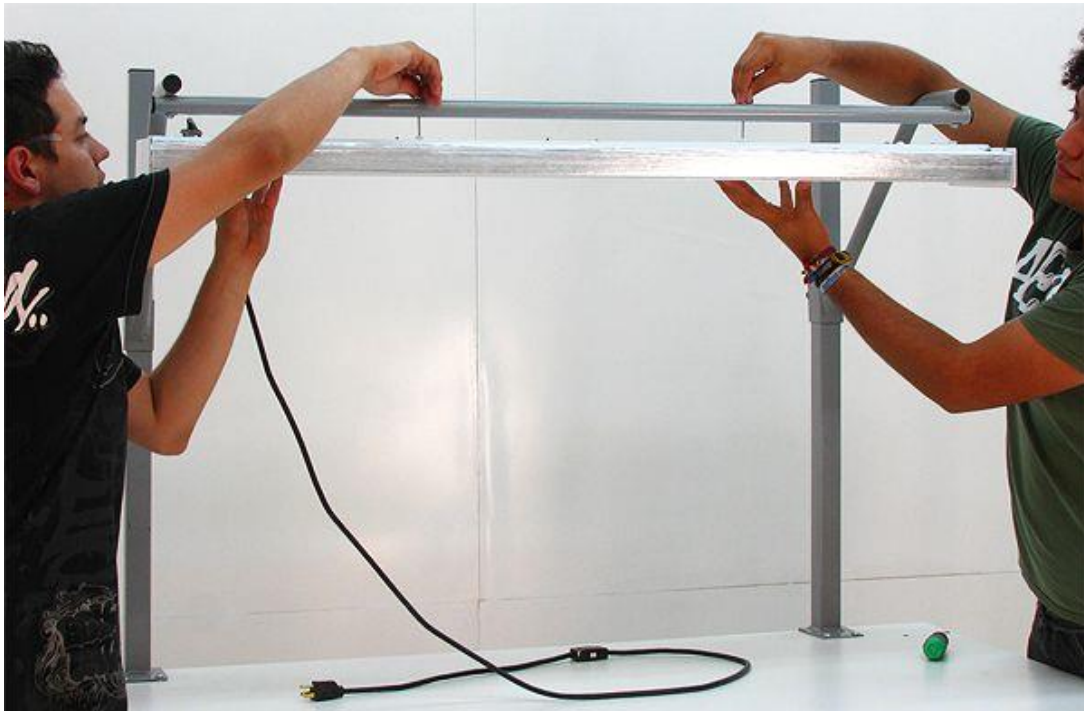

# Light and Frames Assembly

Roosevelt & Roosevelt Hydraulic Series

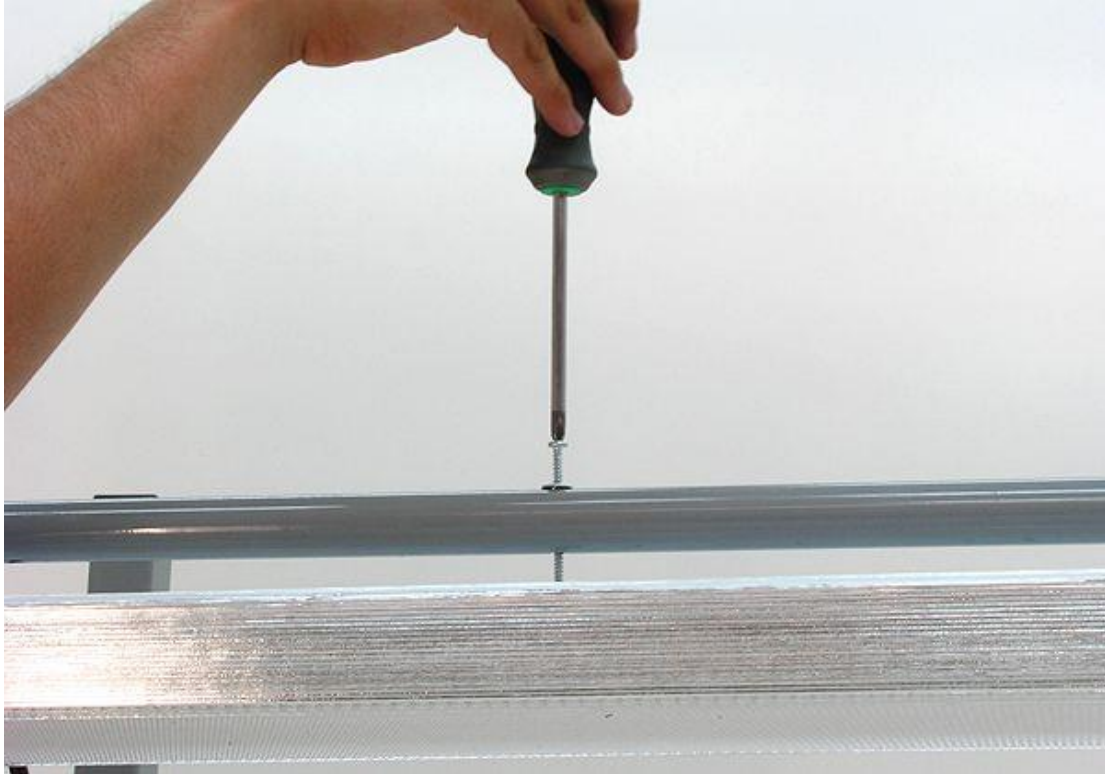

2b. Install the two stainless steel brackets on the horizontal bar with the nut and lock washer on the top. (Change out the photo. The bolt hits the light the way you have it).



2c. Position the light with the switch forward and on the left. Snap the light to the frame.



